



Airborne Bathymetric Laser Scanner

Measuring seabed topography

Multiwavelength LiDAR for highly precise 3D maps

Coastline and water depth provide information about the erosion of coastal landscapes. The Airborne Bathymetric Laser Scanner ABS measures shallow waters from the air and provides data for detailed 3D maps.

Airborne measurements are particularly efficient for monitoring the depth and level of bodies of water or the course of coastlines. The Airborne Bathymetric Laser Scanner ABS from Fraunhofer IPM was specially developed for surveying shallow waters. Thanks to multi-wavelength pulsed time-of-flight measurement, the ultra-lightweight LiDAR scanner captures the topography of the water body bed very precisely.

Ultra-lightweight, compact design

Digital terrain models of water bodies are important for safety in shipping, coastal and flood protection or for documenting the habitat of people, animals, and plants. The Airborne Bathymetric Laser Scanner ABS captures the water surface and depth, but also the peripheral area of water bodies including the adjacent terrain from the air, generating 3D data efficiently and quickly. The lightweight scanner with its compact design can be mounted on commercially available Unmanned Aerial Vehicles (UAV). Based on pulsed time-of-flight ranging, it simultaneously captures the environment with two laser beams of different wavelengths. Using two lasers, the undesirable effect of light refraction, which makes the water depth appear optically less deep than


it actually is, can be corrected. This makes topographic seabed measurements significantly more accurate than measurements with just one laser beam. The ABS measures from an altitude of up to 50 m. The recorded data is available as a complete full waveform as well as a point cloud in LAS format.

Measuring water surface and floor

The laser pulses are emitted at different wavelengths simultaneously via a nonlinear optical process and internal beam expansion ensures safe operation. A scanning unit deflects the beams, each with a diameter of 50 mm, over the water surface at a full angle of 30°. The infrared light (IR) of 1030 nm wavelength does not penetrate the water and thus provides an

Advantages at a glance

- High-precision measurements multiwavelength laser scanning
- Ultra-lightweight system (approx. 3 kg)
- Deployable on commercial UAV / multicopters
- Customization according to application

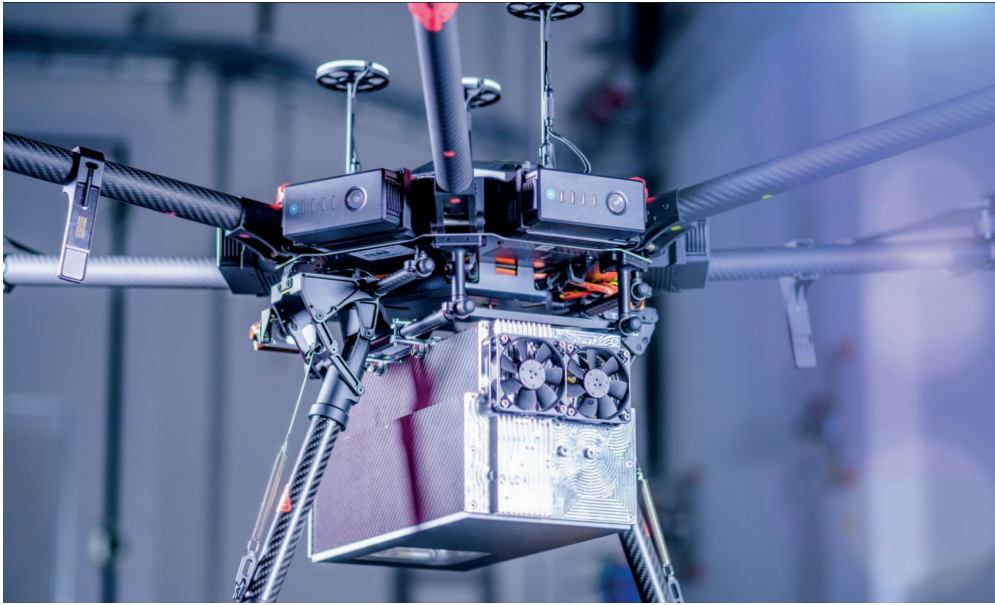

*The ABS mounted on a UAV:
The 3.3 kg scanner can be
mounted on different drone
platforms. A GNSS positioning
solution is integrated for posi-
tion determination*

undistorted signal of the water surface. By contrast, the green light (VIS) of 515 nm wavelength propagates to the bottom but is attenuated due to water turbidity. The backscattered light from the IR and VIS lasers is separated by a beam splitter and directed to a suitable detector using a collecting lens. To maximize light yield especially for the attenuated green light, extremely light-sensitive photomultiplier tubes (PMTs) in addition to conventional avalanche photodiodes (APDs) are used.

Rapid signal conversion

In underwater surveying, the measurement signal consists of complex contributions from water surface, turbidity and water bottom rather than individually separable pulses. Instead of

simple pulse detection, it is essential to record and interpret the entire waveform, which requires very fast data processing. The ABS' central FPGA/CPU unit processes up to 50 GB of raw data per second, performing intelligent data reduction. It controls and communicates with other system components and provides all the necessary interfaces. A GNSS/IMU positioning solution can be integrated.

Integration on UAVs

The shoebox-sized system with a total weight of 3.3 kg can be carried by UAV with a take-off-weight under 25 kg. Fraunhofer IPM supports customers in the customization and integration of the scanner on different platforms.

Technical specifications

Laser	1030 nm and 515 nm wavelength Class 2M according to EN 60825-1:2014
Laser pulse repetition	35 kHz
Measurement range	1 Secchi
Scanning unit	Tilted rotating mirror
Scan unit	Nearly elliptical, 30° beam deflection
Dimensions	325 mm × 155 mm × 165 mm (L×W×H)
Weight	3.3 kg + GNSS positioning unit
Interfaces	Gigabit Ethernet, PTP or PPS + NMEA time synchronization, power supply 20 V – 24 V (6 s LiPo battery)

All specifications and features are subject to modification without notice.

Contact

Prof. Dr. Alexander Reiterer
Head of Department
Object and Shape Detection
Phone +49 761 8857-183
alexander.reiterer@ipm.fraunhofer.de

Dr. Jana Heuer
Business Development
Phone +49 761 8857-413
jana.heuer@ipm.fraunhofer.de

Fraunhofer Institute for Physical Measurement Techniques IPM
Georges-Köhler-Allee 301
D-79110 Freiburg
www.ipm.fraunhofer.de/en